




Assembly and Installation Instructions for Model's

30065/6/7FM

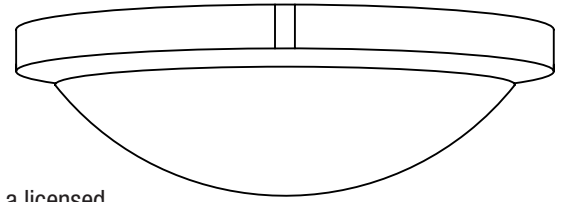

CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.


Warning please make sure the electrical breaker is shut off before commencing with this installation

Read and familiarize yourself with these instructions before commencing

This fixture is certified for ceiling mounting only and is suitable for Damp locations and dimmable with a Triac Dimmer

The fixture uses a 120v A/C LED panel which is supplied with a clear glass cover plate, no driver required

Package Contents		
Part	Description	Qty
A	Mounting bracket	1
B	J-Box mounting bolts	2
C	Fixture mounting bolts & nuts	2
D	Electrical wire connectors	3
E	Fixture base	1
F	A/C LED module	1
G	Diffuser frame	1
H	Frame brackets (attached to frame)	3
I	Frosted glass diffuser	1

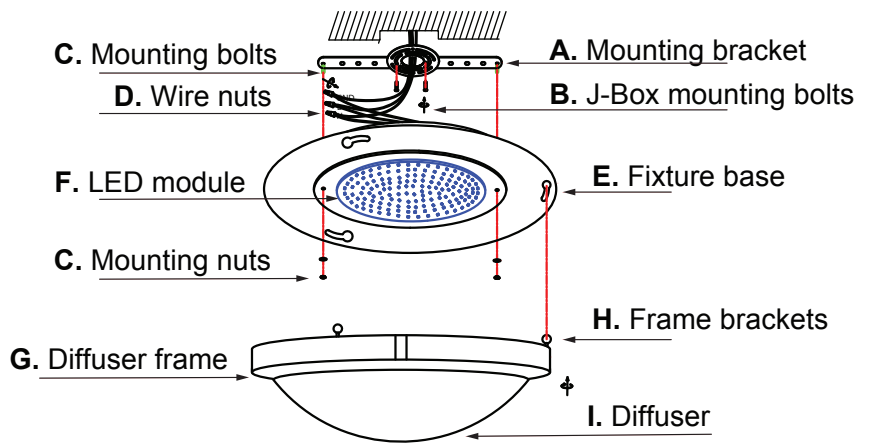

Installing the fixture *please ensure the electrical breaker is switched off before commencing*

1	Attach the supplied mounting bracket (A) with the two supplied mounting bolts (B) to a Junction-Box, not supplied.	
2	Connect the supply wires to the fixture wires using the supplied electrical wire connectors (D). White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.	
3	Align the bolts (C) attached to mounting bracket (A) to the fixture base (E) and secure with the supplied nuts (C).	
4	Remove two of the frame brackets (H) from the diffuser frame (G), gently insert the frosted glass diffuser (I) into the diffuser frame (G) and re-attach the frame brackets, securing the frosted glass diffuser.	
5	Attach the diffuser frame (G), to the fixture base (E) by inserting the round knobs of the frame brackets (H) into the key-hole slots on the fixture base (E) and twist to secure.	
6	Switch on the electrical breaker switch and your new fixture is ready for many years of trouble free use	

